

QUICK INSTALL GUIDE

Site Survey



A phone can pick up at least weak wifi at the gate




There is at least 1 MEG upload speed



Router security is at least WPA or WPA2



2.4G wifi (B/G/N) available



There are NOT duplicate SSID names

Earthing



This product **MUST** be EARTHED in the following states in order to qualify for manufacturers warranty


FL, LA, MS, AR, OK, MO, AL, IL, KY, TN, IN, KS, SC, GA, IA, TX, OH, NC, NE, MD, WV, VA, DE



Continue overleaf


TOP TIP

Bench test BEFORE full site install. This will save you time later!

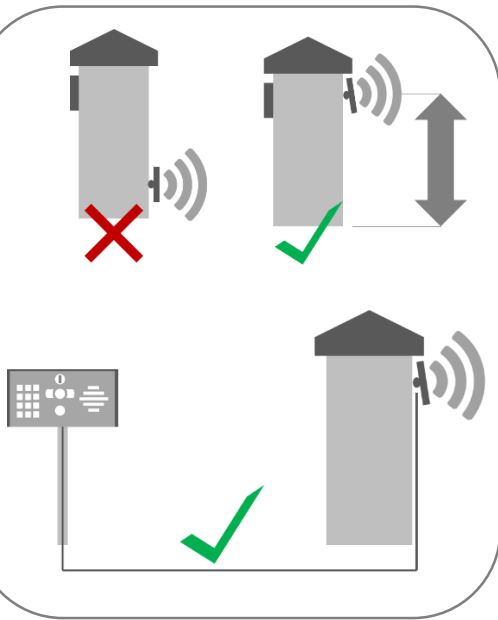

Site Wiring

Use 110V surge protection!

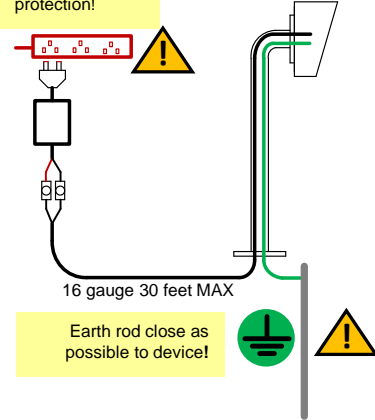


16 gauge 30 feet MAX

Earth rod close as possible to device!

Power


To Earth Rod!

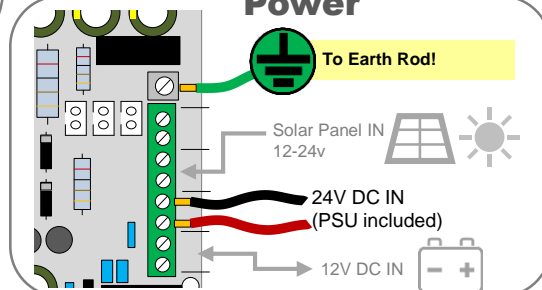

Solar Panel IN
12-24v

24V DC IN
(PSU included)

12V DC IN

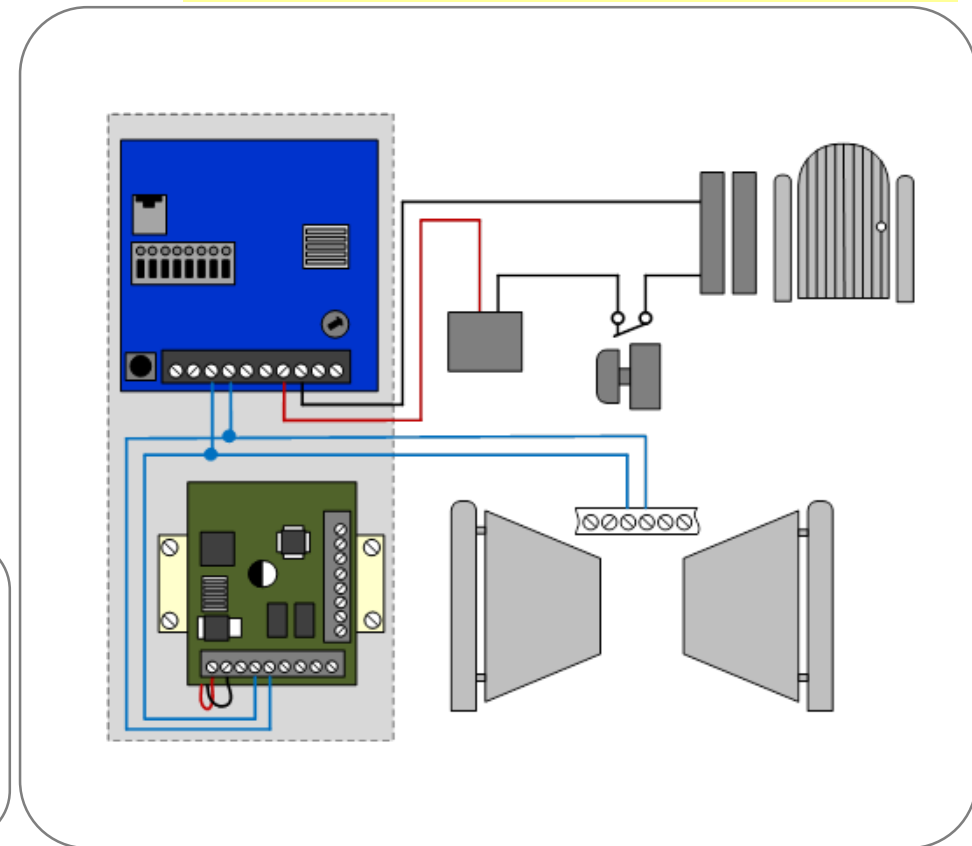

SCAN ME

QUICK SETUP GUIDE



SCAN ME



SCAN ME




1. Download the app PRO2



SCAN ME

Download full instructions

2. Find code button inside on main board



3. Press for 3 seconds



Network X

Network Y

Bell-123456

4. Search for wifi networks on phone

5. Enter default password below to join

Bell-xxxxxx

123456789

6. Open app & press SETTINGS

7. Press to ADD an Intercom

8. Search

9. Touch banner to select

10. Press to confirm

11. Check video and sound works

12. End call and go to settings

13. Press WIFI icon

14. Press to search for local networks

15. Select the network

16. Enter the password for the network. Take care to enter correctly!

17. Wait 2 minutes while intercom reboots and connects to wifi network

18. Check video and audio working.



Be ahead