

# PRO2 Wifi Firmware Update Instructions

Ensure the intercom is currently online and can be viewed from a phone or device on the same network

With a network connected PC on the same network, go to [www.aesglobalonline.com](http://www.aesglobalonline.com) and select Downloads link.

Download the following onto your PC..

a. AES Firmware Updater.

b. the latest BIN file.

The screenshot shows a window titled "Search for Doorbell" with a search results list on the left and a configuration panel on the right. The search results list contains one entry: "Bell(192.168.1.171)[81]". The configuration panel is divided into three tabs: "Basic information", "Advanced Setup", and "Other". The "Basic information" tab is active, showing the following fields:

IP	192 . 168 . 1 . 171	<input checked="" type="checkbox"/> DHCP
Subnet mask	255 . 255 . 255 . 0	
Gateway	192 . 168 . 1 . 254	
DNS1	8 . 8 . 8 . 8	
DNS2	192 . 168 . 1 . 254	
MAC	00 6e 02 82 46 01	
Port	81	
ID	AES-000009-AEDEB	
Name	Bell	<input type="button" value="Setting"/>
System version	4.3.12.38	
Web version	11.1.0.20141125	


At the bottom of the window, there are fields for "User" (admin) and "Pwd" (empty), and a "Clear Arp" button. There are also "Modify IP" and "Refresh" buttons at the bottom left.

1. Run the "Search for Doorbell Lite" application on your PC as administrator and allow firewall access when prompted.

2. If the intercom is on the same network, the search tool will identify it and will show its IP address under Device.

3. Click on the Bell to highlight it and the blank text fields will then display information about the intercom.

#### 4. Click on “Other” tab

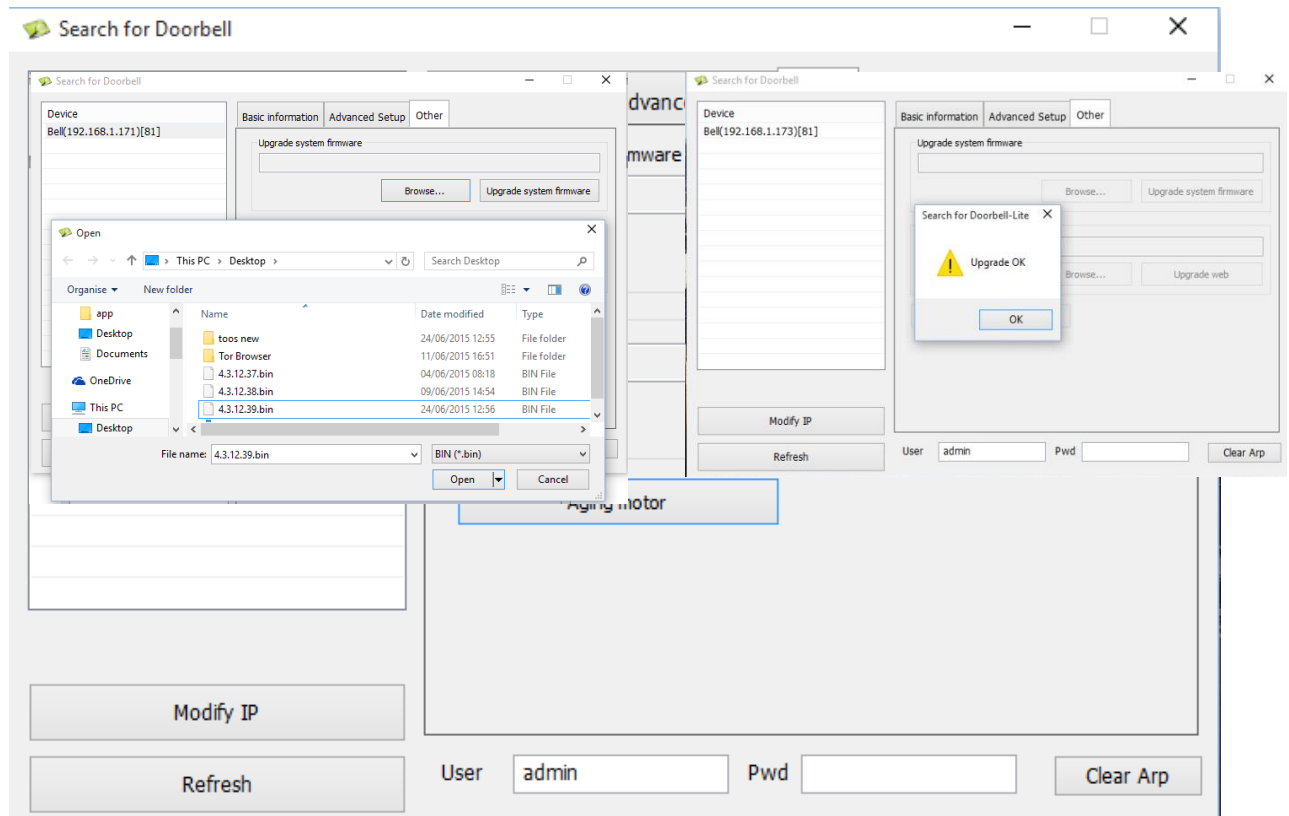

5. Click on Browse and search for the location of the Firmware Bin file and click Open. Then click on “Update System Firmware”.

The intercom will reboot and this may take up to 2 minutes, it will then show the new firmware version under the information tab.

Please note, should you have any difficulties with this procedure, please call BFT technical support, and someone will guide you through the process, or use remote teamviewer program to remotely do the update for you via your PC.