

WIFI-BFT-KPAD

RANGE

Access Control

VIDEO INTERCOM WiFi/LAN

WIFI-BFT-KPAD

Also Available:

BFTA-WIFI-ABK



Wall Mount Model
BFTA-WIFI-ABK



WIFI-BFT-KPAD



*Phone/Tablet not included

WIFI VIDEO

- Speak to, and see visitors from your smart-phone or tablet.
- Easy wireless connection to existing home wifi.
- Long range directional patch antenna at gate (up to 30-150 yards dependent on router and environmental conditions).
- Can call up to 4 devices at the same time.
- Get a video call from your gate / door even when you're away
- No SIM card, no call charges (data charges may apply when phone not connected to wifi).
- No home phone line needed.
- Less susceptible to lighting strikes - no wire in the ground.

Get the BFT Predator Pro APP at itunes and Google Store

Simple setup by mobile phone. Connect to the system video directly through your phone's or tablet's wifi, enter the pass code for the home hub

wifi and your devices are connected.

View the gate/door any time with monitoring mode!

Open gates with your phone / tablet.

Built in RJ45 Ethernet socket for CAT5 cabled installs.

Can work with most open market Ethernet-overmains

adaptors for longer range applications.



Be ahead

BFT Americas, Inc.
6100 Broken Sound Parkway N.W.
Boca Raton, FL 33487

T: +1 561 995 8155

T: US. 1877 995 8155


➔ info.bft@bft-usa.com

➔ www.bftaccess.com


WIFI VIDEO

PHYSICAL MEASUREMENTS

WiFi-BFT-KPAD

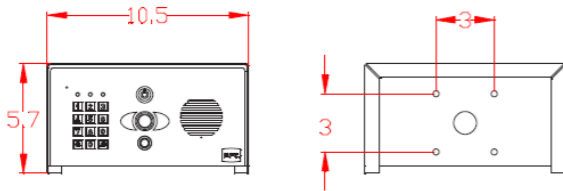

BFTA-WIFI-ABK

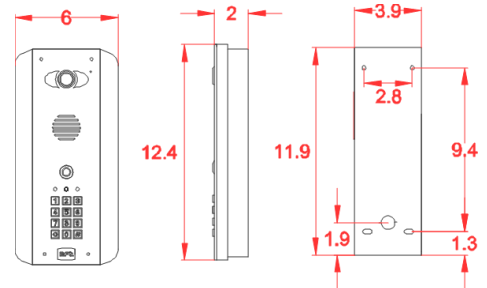

TECHNICAL DATA

WiFi-BFT-KPAD

BFTA-WIFI-ABK

GENERAL:

Voltage: 24v dc

Recommended cable @ 25 feet: 14 gauge

Solar operable: Yes with high capacity panels

Current on standby: 90mA

Operating Current: 330mA

Peak Demand Current: 2 Amps

CAMERA:

Color: Yes

Viewing angle: 100 degrees.

Night Vision: Yes, mono with IR illumination.

Pixels: 640x 480

KEYPAD MODULE:

Relays: 3 relays, max 2 amps, 24v ac/dc load

Latching: Yes

Codes: 1000 total

ANTENNA:

Frequency: 2.4GHz

Gain: 14dB

Typical range: Approx 20 yds further from router than a phone

Cable: 30 feet RG58, 50 ohm, with SMA male

Transmission Angle: 60 Degrees



Be ahead

BFT Americas, Inc.
6100 Broken Sound Parkway N.W.
Boca Raton, FL 33487

T: +1 561 995 8155

T: US. 1877 995 8155

➔ info.bft@bft-usa.com

➔ www.bftaccess.com